



Proven Performer

# HF8015+dlp ultra light

Since its introduction in 1999, MinXray's **HF8015** series has been the top selling portable x-ray unit and a favorite among equine practitioners. The **HF8015+dlp** is the most advanced model of the series to date.

- exceptionally light weight at 14 lbs.
- state-of-the-art electronic design for consistent performance in the field
- compatible with all digital imaging systems
- best in industry – 5 year limited warranty




Adjustable,  
dual laser  
pointers

mAs or  
exposure time  
display option

Large touch-pad  
control

Easily programmed for  
storage of five exposure  
techniques

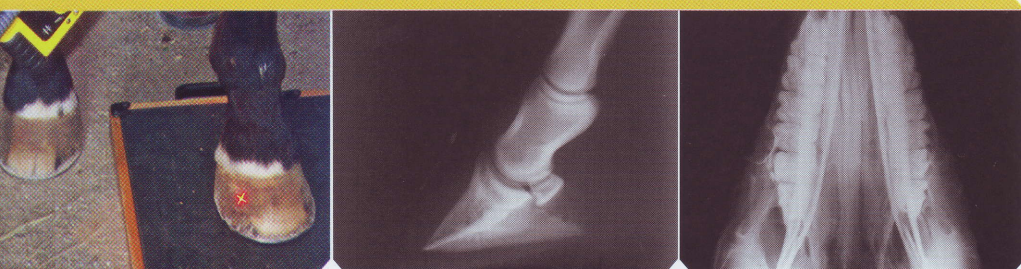

**MINXRAY**<sup>®</sup> INC.  
EXCELLENCE IN IMAGING SINCE 1967

WWW.MINXRAY.COM



## High Frequency Design

MinXray's full-wave rectified high frequency units are the most efficient portable x-ray generators in the world. Conventional units (self rectified, line frequency) are only about one-third as efficient as these technologically advanced units. Therefore, considerably more radiation output per pound of system weight is available from the MinXray HF designs. As an added benefit, the output of these units is independent of line voltage variations... a very important feature for field use.

### HF8015+dlp

X-ray Output	15 mA @ 50 – 80 kVDC (2 kV steps)
AC Input	115 V or 230 V (50/60 Hz); specify voltage desired
Line Voltage Adjustment	Automatic, dynamic
Timer	Ultra high resolution, 0.01 – 1.99 sec., 199 steps
Internal Power Supply	Constant potential, 60 kHz, full-wave rectified
X-ray Tube	SNMI XDT-F80
Focal Spot Size	1.0 mm
Anode Heat Storage	7 kHU
Total Filtration	2.7 mm Al equivalent
Collimator	Continuously adjustable light beam type with central X-ray indicator, Mikasa R-200V J01
Dual Laser Pointers (dlp)	Maximum average radiant power: 3 mW; beam diameter: 3mm
Exposure Switch	Two stage deadman type
Exposure Cord	8 feet (2.4 meters)
Power Cord	20 feet (6.1 meters)
Size	5 x 6 x 12.5 inches (12.7 x 15.2 x 31.6 cm)
Weight	14 lb (6.3 kg)

## Ordering Information

### HF8015+dlp Ultra Light High Frequency Portable X-ray Unit:

Exposure switch and cord, power cord and carrying case

**X100S** Tripod stand

**X100SCC** Carrying bag for X100S tripod

**EFB15** Redden Equine foot block



Unit comes with a sturdy carrying case.



HF8015+dlp shown here in low position on X100S tripod stand.



HF8015+dlp shown with EFB15 Redden Equine Foot Block for consistent hoof imaging.

For more information about MinXray products, consult your local dealer.

3611 Commercial Avenue • Northbrook, Illinois 60062-1822, USA  
1-847-564-0323 • Toll Free: 1-800-221-2245 • FAX: 1-847-564-9040  
E-mail: [info@minxray.com](mailto:info@minxray.com) • Web: [www.minxray.com](http://www.minxray.com)

Specifications subject to change without notice.

**MINXRAY**®  
INC.  
EXCELLENCE IN IMAGING SINCE 1967

© 2009 MinXray, Inc. All Rights Reserved 5/09